


Eugenie

Candle chandelier

MODEL: LI002887

DESIGN DRAWING

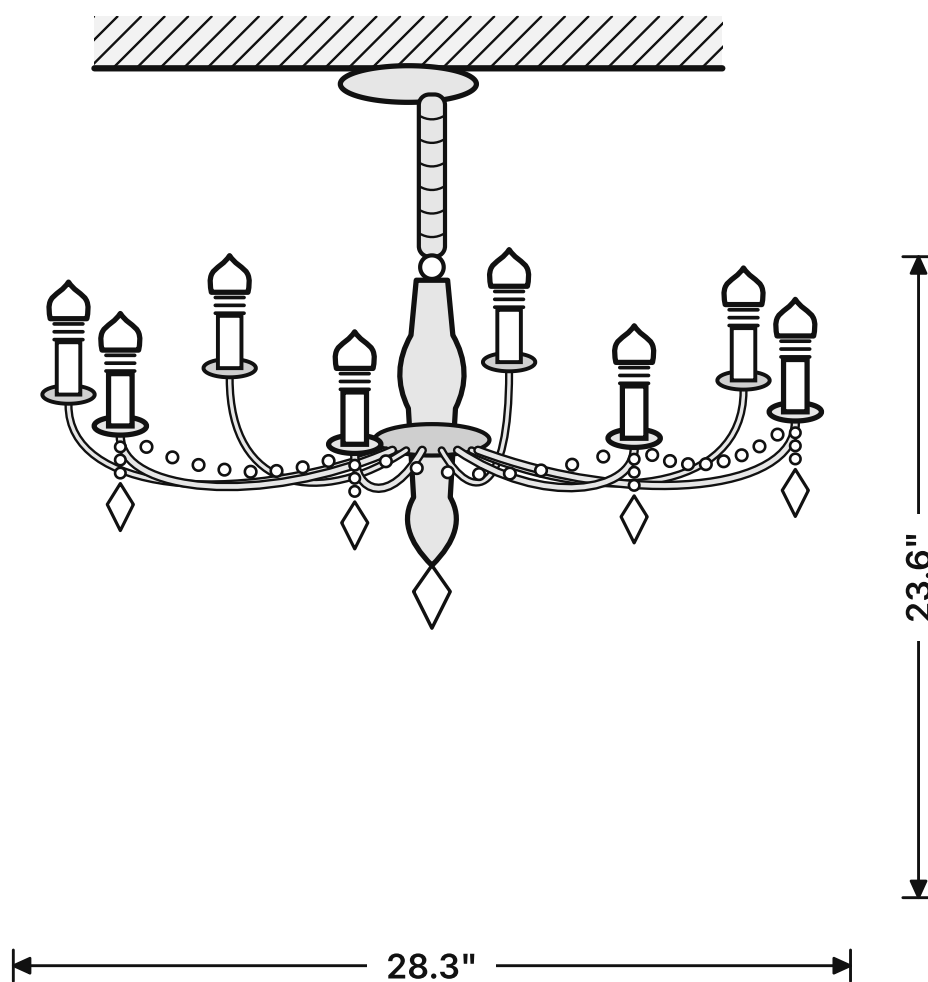

Shown: 8 Light



Read all instructions before you start, and keep them for future reference.



Installation precautions

1. Turn off the power at the breaker before you start, and check the wires are dead with a voltage tester.
2. If you are not sure how to wire it, have a licensed electrician do it. Follow local electrical codes.
3. The ceiling box and hook must be rated for 28.7 lb (8-light) or 37.5 lb (10-light).
4. Wear gloves to keep the glass and crystals clean.

Tools needed



Phillips screwdriver



Wire stripper



Voltage tester










Step ladder



Pliers

Parts list

CHECK ALL PARTS BEFORE YOU START

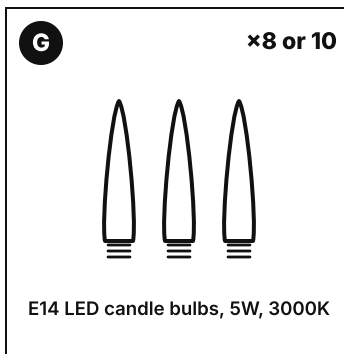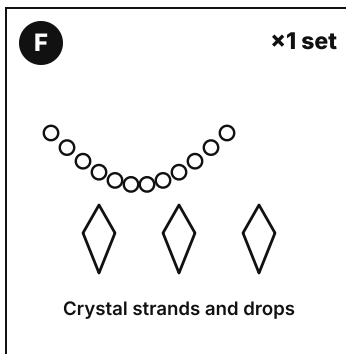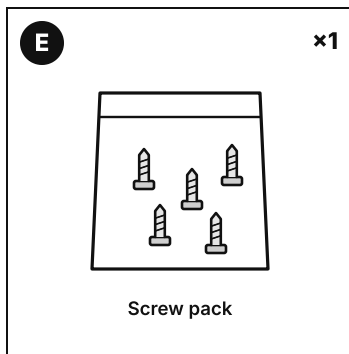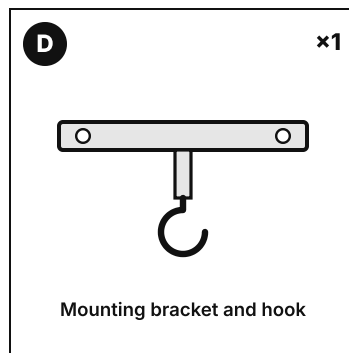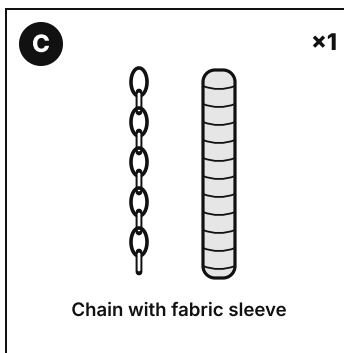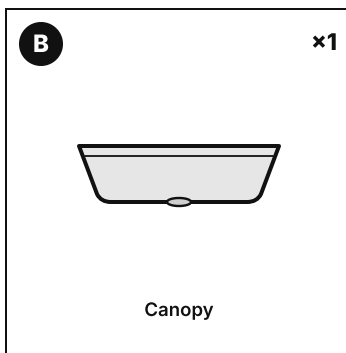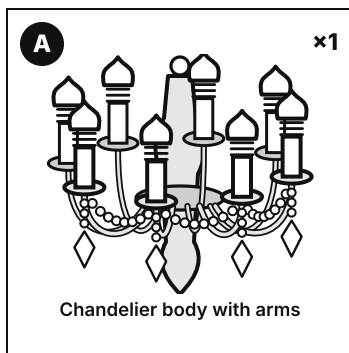


Wiring

	Wire	House supply	Fixture
L	Live (hot)	black	black or marked wire
N	Neutral	white	white or ribbed wire
G	Ground	green or bare copper	green or green-yellow

Join each pair with wire connectors. Connect ground to the green screw on the bracket or plate if there is one.

Exploded view

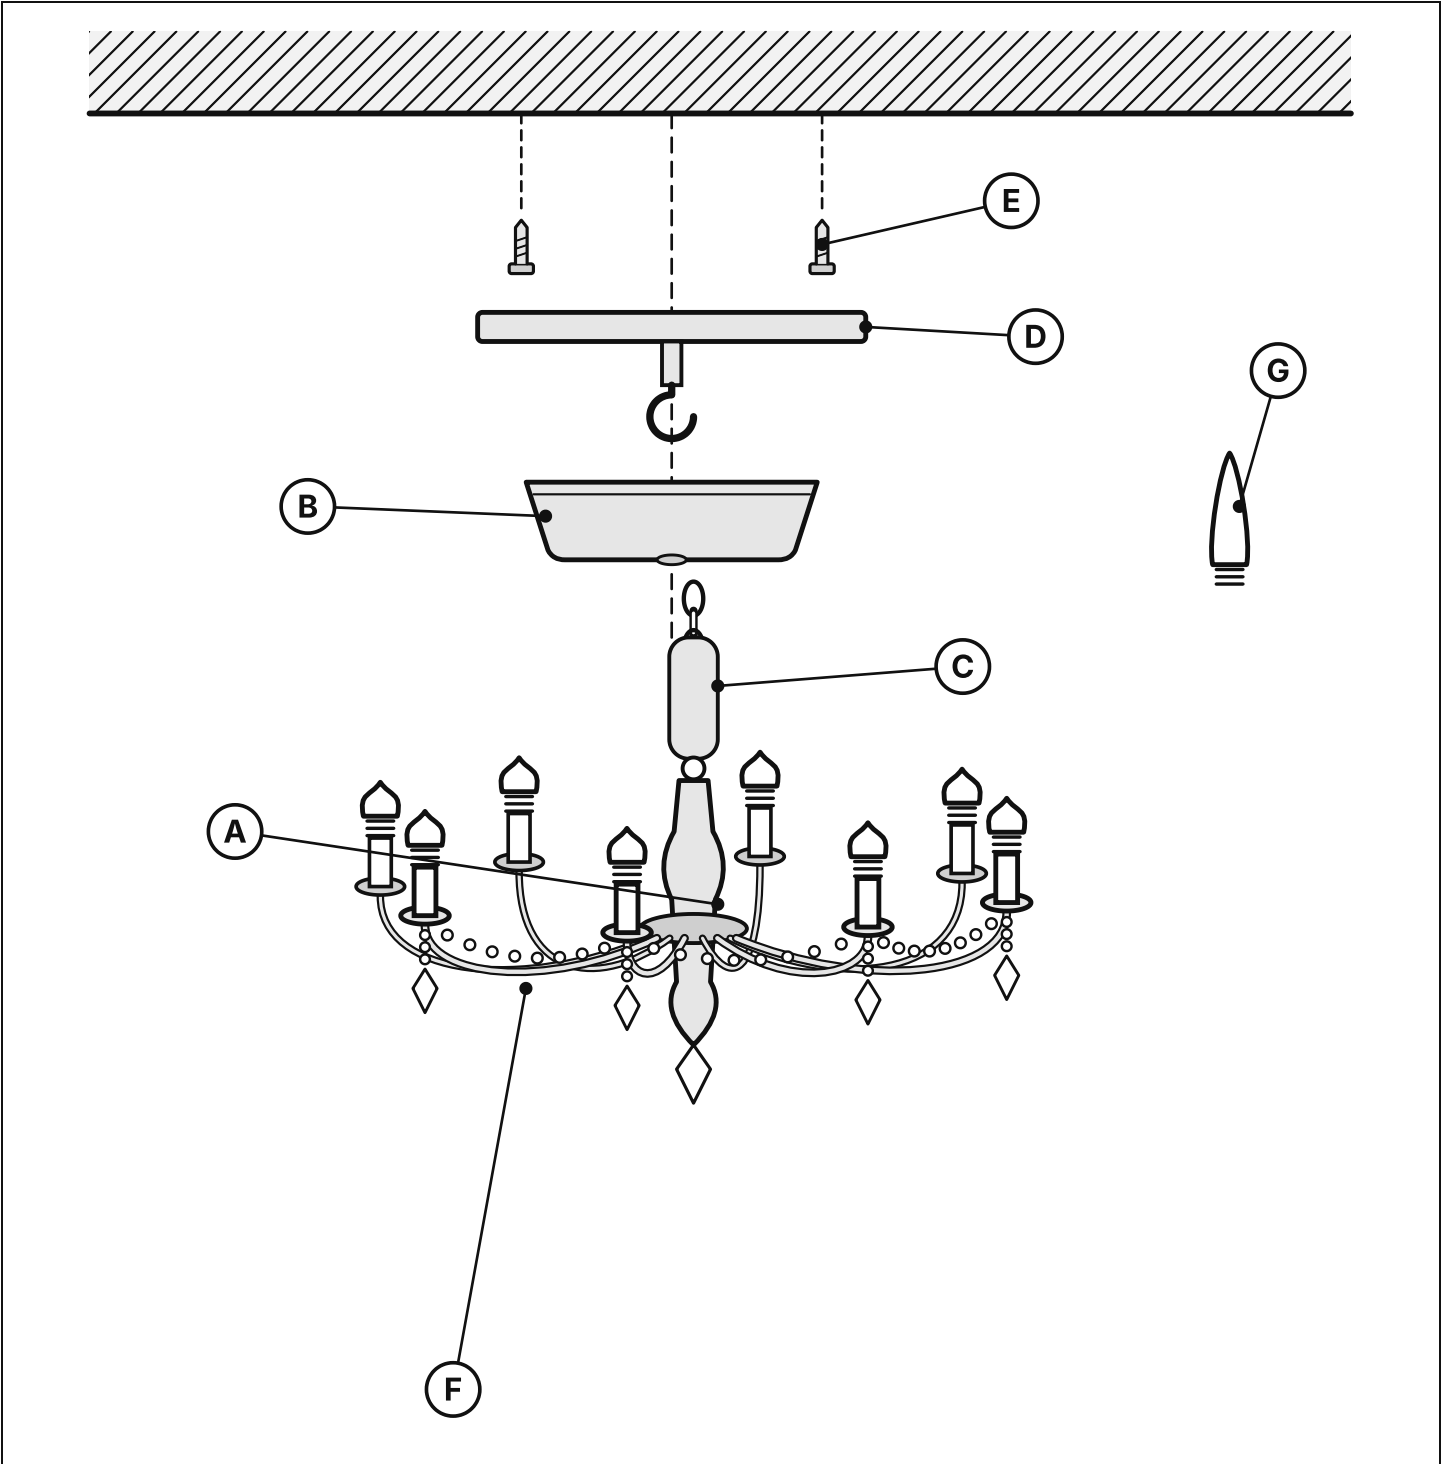


- A** Chandelier body with arms ×1
- B** Canopy ×1
- C** Chain with fabric sleeve ×1
- D** Mounting bracket and hook ×1
- E** Screw pack ×1
- F** Crystal strands and drops ×1 set
- G** E14 LED candle bulbs, 5W, 3000K ×8 or 10

Size	Diameter	Height
8 Light	28.3"	23.6"
10 Light	33.5"	26.8"

Installation


STEPS 1-6 OF 7

1

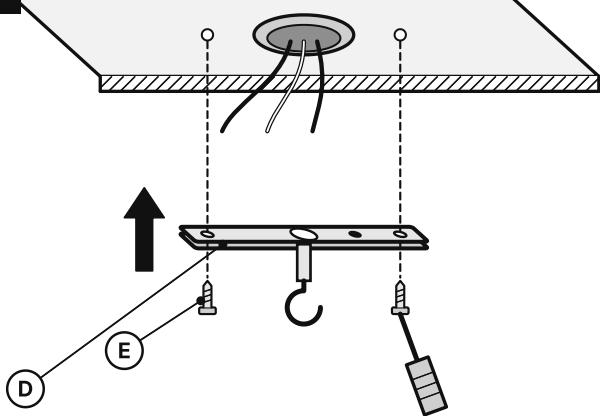

Fix the bracket and hook (D) to a ceiling box rated for the weight, with the screws (E).

2

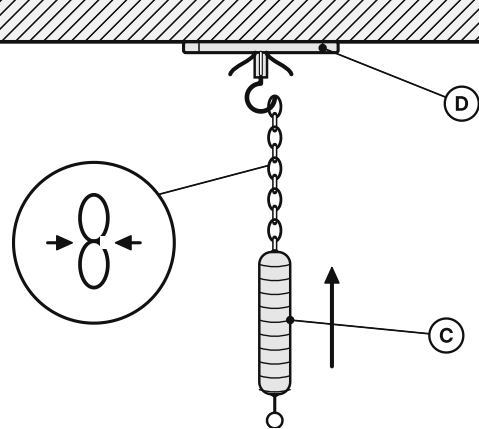


Hang the chain (C) on the hook and close the link. Slide the sleeve over chain and wire.

3


House supply

- L** Live (hot) black
- N** Neutral white
- G** Ground green or bare

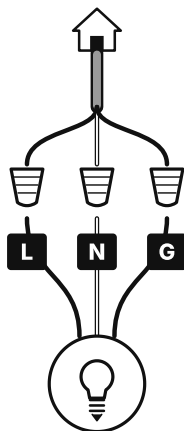


Connect the wires: L to L, N to N, G to G, with wire connectors.

4

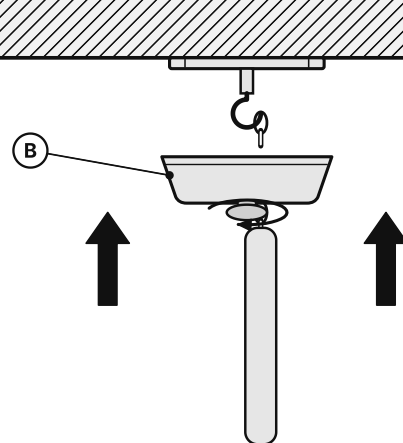


Slide the canopy (B) up the chain and tighten it against the ceiling.

5

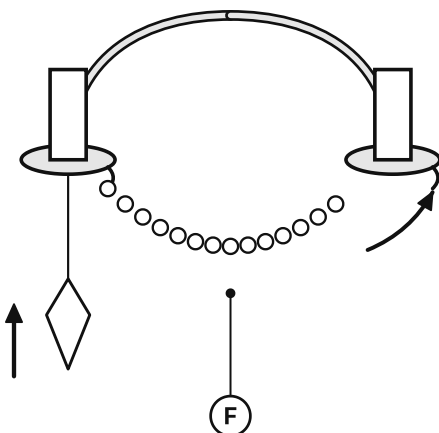

Hook the crystal strands and drops (F) onto the arms.

6

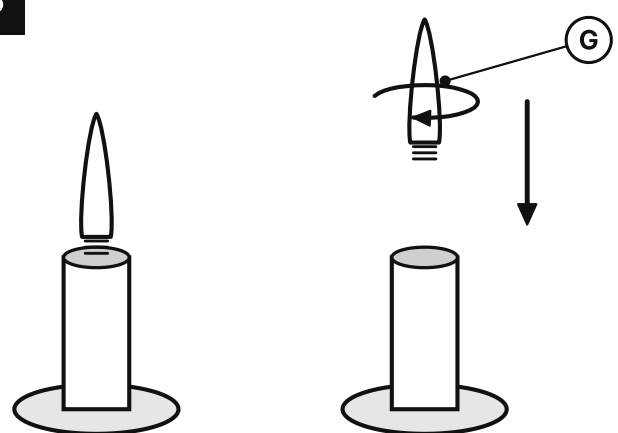


Screw an E14 candle bulb (G) into each holder.

Installation

STEP 7 OF 7

7

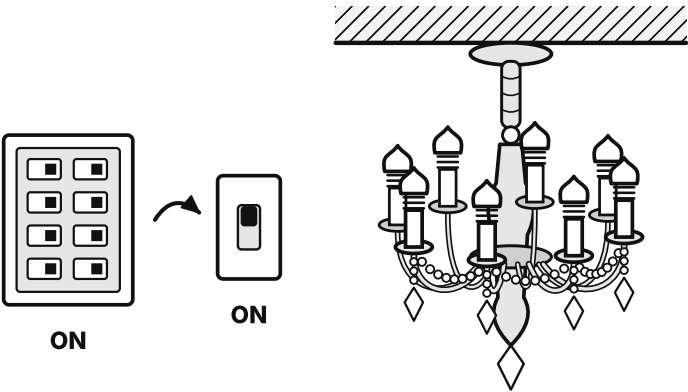

Turn the breaker on and switch on at the wall.

Care

- Wipe clean with a soft, dry cloth.
- Dust the glass arms individually rather than wiping across them, since a cloth dragged over cut edges will snag.
- Do not use solvents or abrasive cleaners on the electroplated frame.
- Switch the power off at the breaker before cleaning, and let bulbs cool before touching them.

Troubleshooting

Problem	What to do
Light does not come on	Check the breaker and wall switch. Turn the power off and check each wire connection is tight.
Light flickers	Turn the power off and re-make the connections. On a dimmable model, use an LED-rated dimmer.
Fixture hangs crooked	Adjust the cord, chain or cables until it hangs level.

Need help?
Email info@norafurnish.com with your order number and a photo. A part missing or damaged? We will send a new one.

NoraFurnish