


Lunette

Pillar light, hardwired or solar

MODEL: LI002157

DESIGN DRAWING

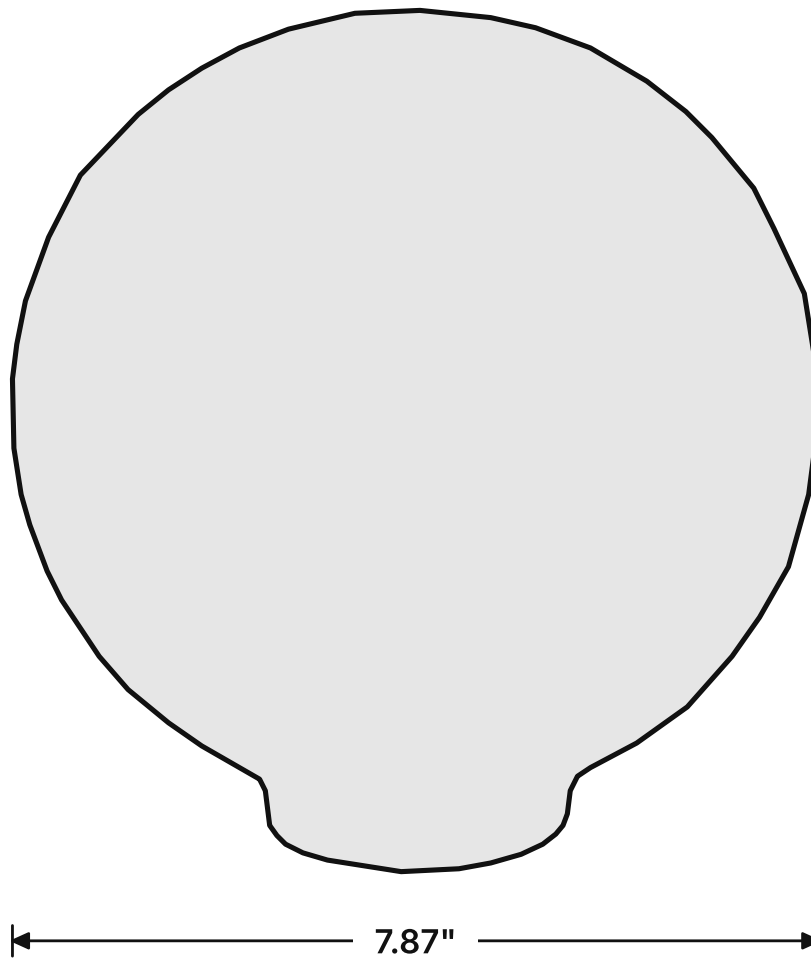

Shown: 8"



Read all instructions before you start, and keep them for future reference.



Installation precautions

1. Turn off the power at the breaker before you start, and check the wires are dead with a voltage tester.
2. If you are not sure how to wire it, have a licensed electrician do it. Follow local electrical codes.
3. Fix the light only to a solid, level base.
4. Place the panel where it gets several hours of direct sun.

Tools needed



Phillips screwdriver



Wire stripper



Voltage tester



Step ladder






Drill



No tools needed

Parts list

CHECK ALL PARTS BEFORE YOU START




Wiring

	Wire	House supply	Fixture
L	Live (hot)	black	black or marked wire
N	Neutral	white	white or ribbed wire
G	Ground	green or bare copper	green or green-yellow

Hardwired: Join each pair with wire connectors. Connect ground to the green screw on the bracket or plate if there is one. Solar: no wiring. The built-in panel charges the battery by day.

Exploded view

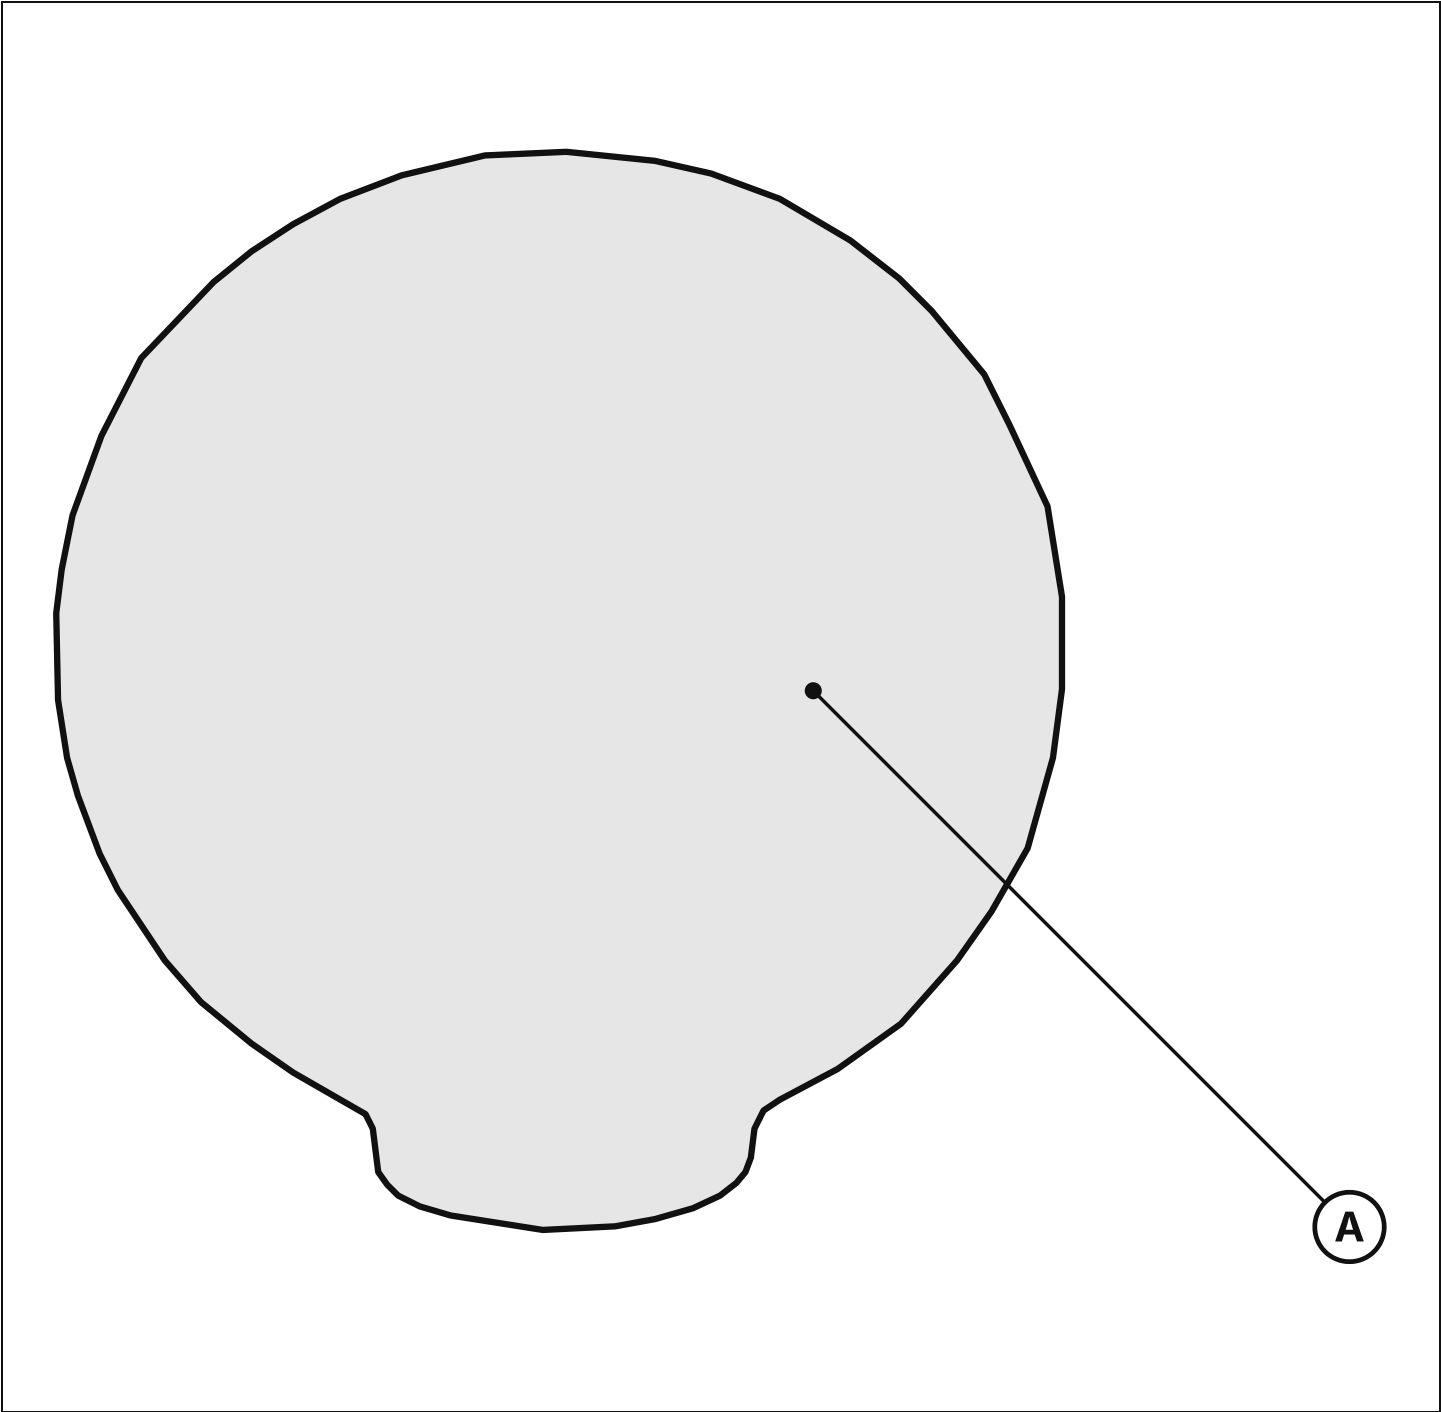

A Outdoor light ×1

B Mounting screws and anchors ×1 set


C E27 bulbs ×1 set

Size	Diameter
8"	7.87"
12"	11.81"
16"	15.75"
20"	19.69"
24"	23.62"

Installation

STEPS 1-6 OF 8

1

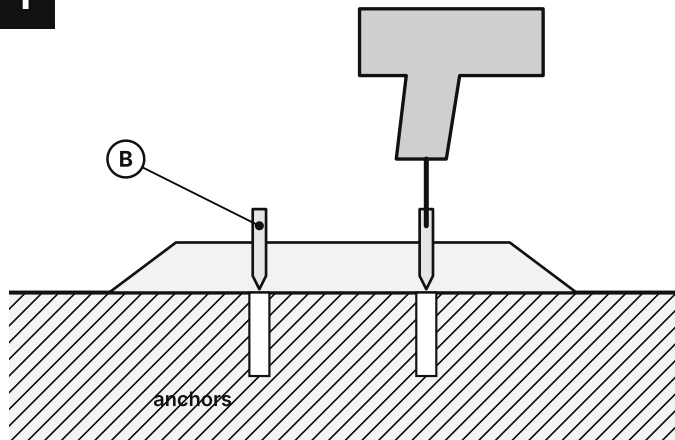


Hardwired: Mark the fixing holes on a solid, level base. Drill them and fit the anchors (B).

2


House supply

- L** Live (hot)
black
- N** Neutral
white
- G** Ground
green or bare

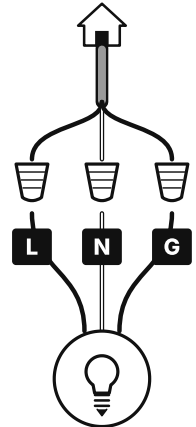



Hardwired: Connect the wires in a weatherproof box: L to L, N to N, G to G.

3

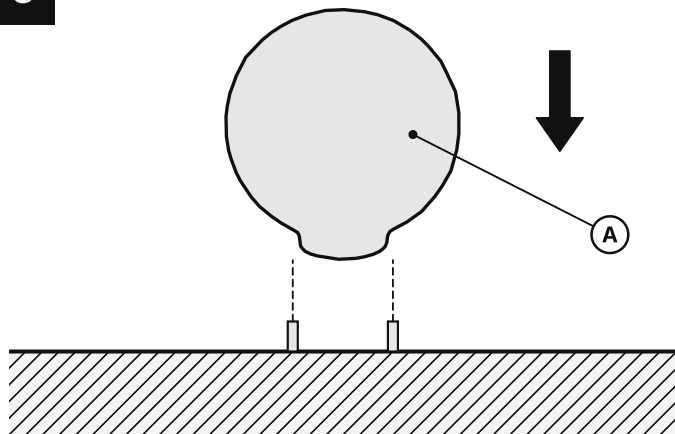


Hardwired: Fix the light (A) to its base with the screws.

4

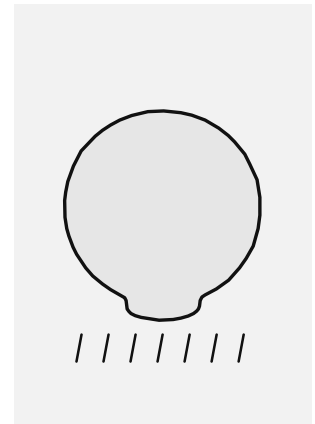


Hardwired: Turn the breaker on and switch on.

5

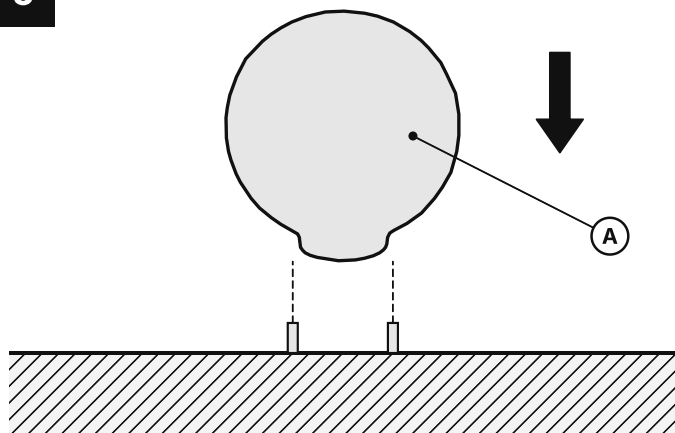

Solar: Fix the light to the top of the post or pillar with the screws.

6

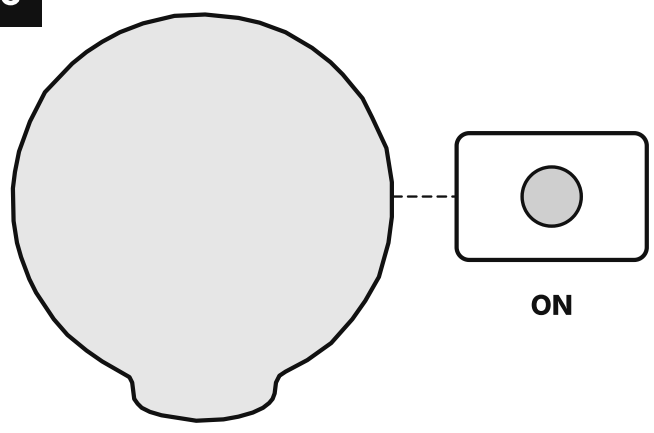


Solar: Switch the light on.

Installation


STEPS 7–8 OF 8

7

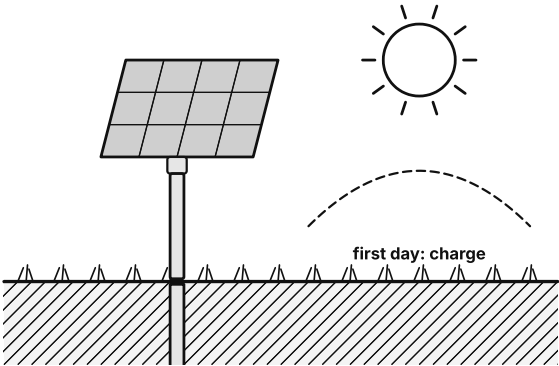

Solar: Let it charge in direct sun for the first full day.

8

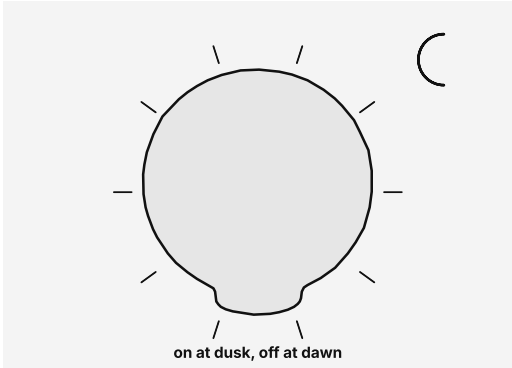

Solar: It comes on by itself at dusk and goes off at dawn.

Care

- Wipe clean with a soft, dry cloth.
- Avoid acidic cleaners on the stone.
- Switch the fixture off and let it cool before cleaning.

Troubleshooting

Problem	What to do
Light does not come on	Check the breaker and wall switch. Turn the power off and check each wire connection is tight.
Light flickers	Turn the power off and re-make the connections. On a dimmable model, use an LED-rated dimmer.
Lights do not come on	Check the panel is switched on and gets several hours of direct sun. Charge a full day.
Short run time	Clean the panel and move it out of shade. Run time drops on cloudy days.

Need help?

Email info@norafurnish.com with your order number and a photo. A part missing or damaged? We will send a new one.

NoraFurnish